

4


3

2

1


D

D

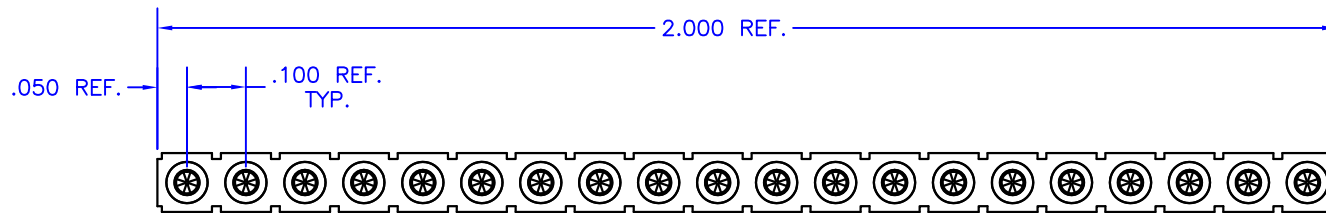


C

C

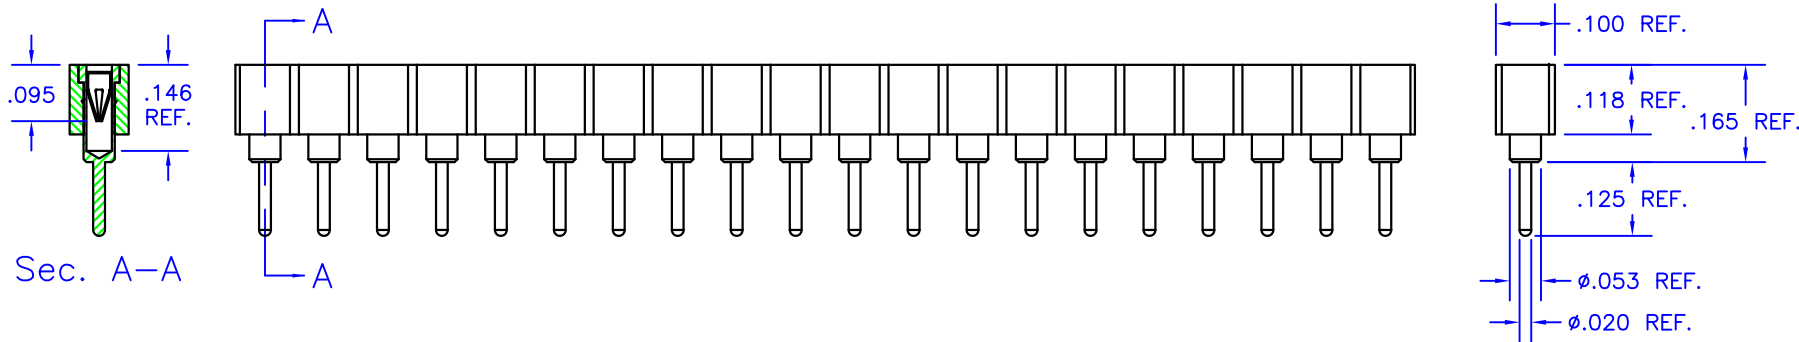

B

B

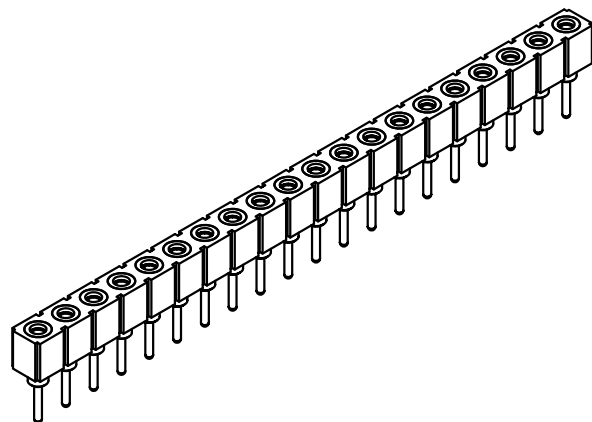


A

A

NOTES:

1. Unless otherwise noted, dimensions are in inches.
2. Shell: 360 brass, half-hard, with 200 μ m tin/lead over nickel
3. Contacts: Beryllium copper with 30 μ m gold over nickel
4. Body: Glass-filled black polyester, rated UL94V-0
5. Current rating: 3 amps, for 10°C temperature rise.
6. Solder mount in .028-.035 diameter hole.
7. Cut to length to suit application.
8. Mill-Max Part No. 310-93-120-41-001000

TOLERANCES - UNLESS OTHERWISE SPECIFIED .XX = ± 0.05 [.002] .XXX = ± 0.005 [.0002] ANG. = $\pm 2^\circ$		TITLE: MATING SOCKET FOR .015-.025 DIAMETER PINS	MODEL:
		SUBJECT: MECHANICAL DRAWING	MS06
ENGINEER: D-M	DRAWN BY: R.MOR	DCAL: 13242	SPL: 1 OF 1
		FILENAME: MS06	REV: D DATE: 03JUN13

4

3

2

1